

Product Information

Relay Coupler PT570



depth 73 mm

Technical data

- Plug-in relay
- Switching current 6 A / 250 V AC
- Contact material AgNi 90/10
- Safety protection acc. to IEC664 / VDE 0106
- Protection class III acc. to VDE 0110b
- Test voltage 2 kV
- Finger safe test button, lock or unlock possible
- DIN rail mounting TS35
- International certifications



Ordering code

Storage program

Description	Supply voltage	Ordering number
Relay	24 V DC (1780 Ω)	PT570024
Relay	24 V AC (190 Ω)	PT570524
Relay	230 V AC (19470 Ω)	PT570730
Socket		PT78704
Retaining clip		PT16016
Labeling shield		PT16040
LED-module red*	24 V DC	RPML0024
LED-module red	24 V AC	RPML0524
LED-module red	230 V AC	RPML0730

*including inverse diode


Package program

(contains 1 relay, socket, LED-module, retaining clip and labeling shield)

Package 24 V DC		PT4P4L24
Package 24 V AC		PT4P4R24
Package 230 V AC		PT4P4T30

Dimensions / connection diagram

LED-module

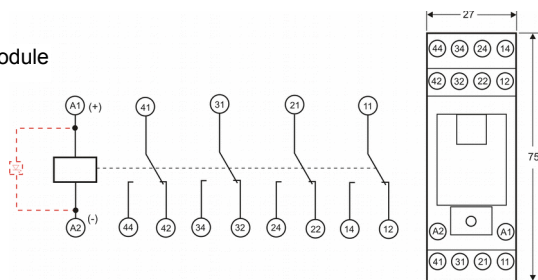

... professional Instruments "MADE IN GERMANY"