


GENERAL FEATURES

- Different stroke (measuring) lengths between 0...300 mm and 0...1200 mm
- Incremental output
- Stainless steel measuring wire
- Small structure
- IP53 protection class
- Compact design
- Easy installation
- 2 m/s maximum speed
- Shock/Vibration resistant
- Aluminum anodized body



AWE 110 wire encoders convert linear motion into incremental digital pulses. Different stroke lengths between 0...300 mm and 0...1200 mm are available. Optionally other stroke lengths, resolutions, cable lengths and socket connectors can be requested.

They make measurement by pulling and rewinding stainless steel wire. Usage is practical and usage area is quite wide. By connecting to a counter or position controller, they become a perfect system in high resolutions for position control in wood processing, marble machines, glass processing machines and other machines.


TECHNICAL SPECIFICATIONS



*Stroke (measuring) Length	Different measuring lengths between 0...300 mm and 0...1200 mm		Maximum Speed	2 m/s
*Resolution	pulse/mm	mm/edge	Required Force	5 N
	5 pulses/mm	0.05 mm	Max Output Current	60 mA (per channel)
	10 pulses/mm (standard)	0.025 mm (standard)	Measuring Type	Optic
	20 pulses/mm	0.0125 mm	Materials	Housing: Aluminum/steel /plastic Measuring Wire: Stainless steel
*Connection Cable	3m (standard), 5m, 10m		IP Protection Class	IP53
*Supply Voltage	5...30V DC $\pm 20\%$		Operating Temperature	-25°C ... +85°C
*Output Signals	A,B,Z (standard)		Relative Humidity	%95
	A,B		Weight	≈550 gr
	A,/A,B,/B			
	A,/A,B,/B,Z,/Z			
Accuracy	$\pm 0.25\%$ FS			

Note: The technical specifications indicated by (*) vary according to the selected model. The detailed code table is shown on page 3.


ELECTRICAL CONNECTION

In the left tablet the cable colors of sensors output signals are given. If the control circuit is suitable in the Line Driver sensors of the not output signals (/A, /B, /Z) have to be added to the system. If it is not suitable /A, /B, /Z signal cables must be fixed as insulated separately. Don't forget that these edges have electricity too.

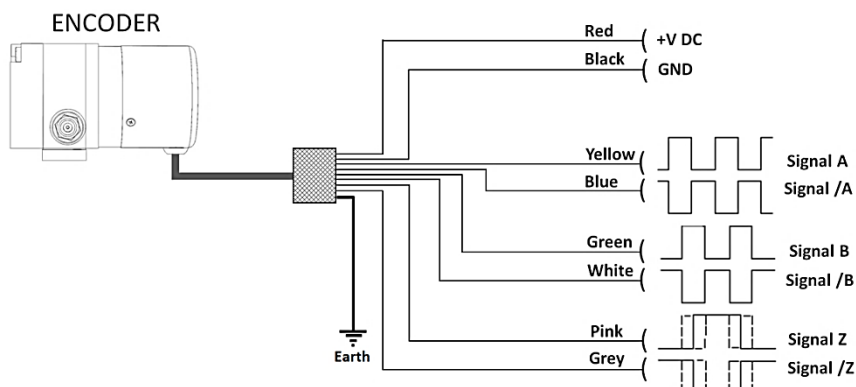


SIGNAL	CABLE COLOR	M12/8 pin SOCKET	M12/5pin SOCKET
		 PIN NO	 PIN NO
A	Yellow	1	1
B	Green	2	2
+V	Red	3	3
0V	Black	4	4
Z	Pink	5	5
/A	Blue	6	-
/B	White	7	-
/Z	Grey	8	-
EARTH	Silver	-	-

DIMENSIONS

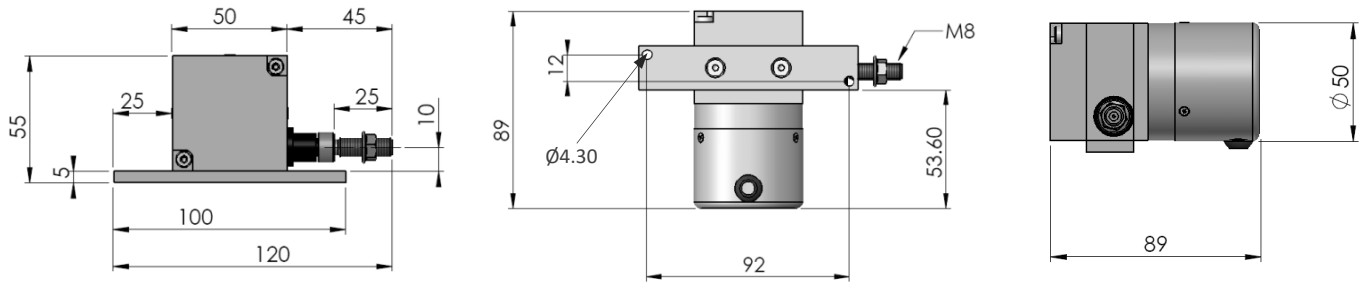


MOUNTING AND WARNINGS

1. Never release the wire after pulling. Otherwise, the coil spring will be damaged.

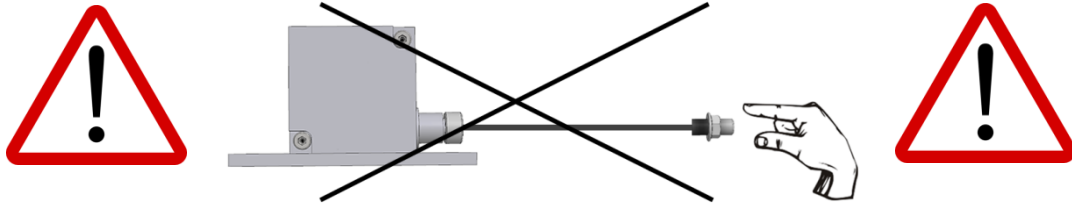


2. The wire encoder must be mounted vertically in position, not be horizontally.

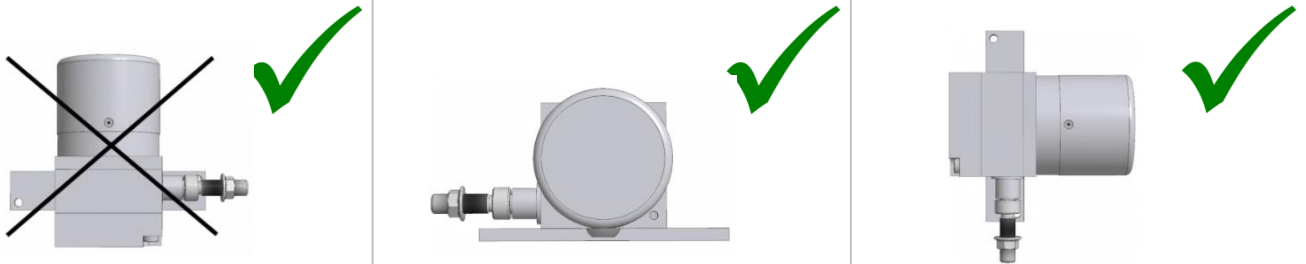

3. If there is a trickle of water (like a rain), the wire outlet must not be a drip of water upstream. If needed please use guide rollers.




4. The wire should not be pulled in angular. If needed, please use guide rollers.

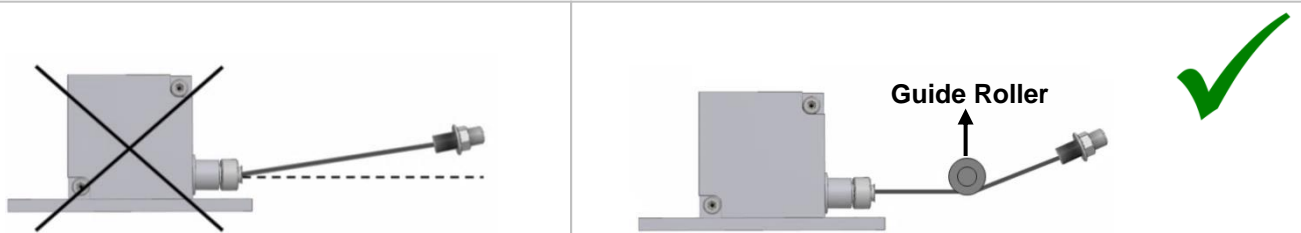


Important Note(!): Failure to comply with these recommendations, the malfunctions that may occur will not be under the warranty.

SOCKET MODELS


M16 8 PIN MALE SOCKET

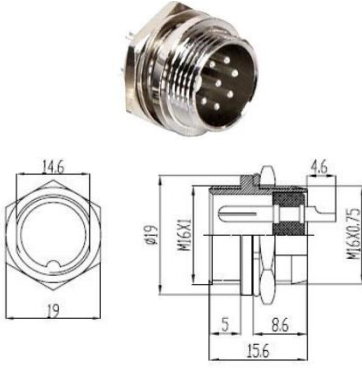

M12 5 PIN MALE SOCKET

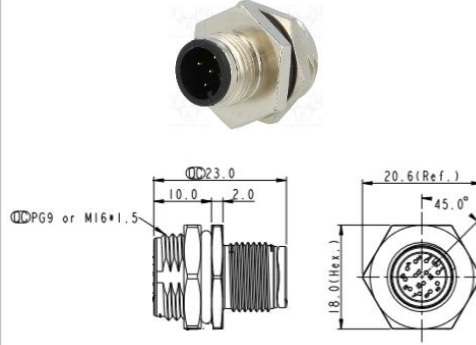


M23 12 PIN MALE SOCKET

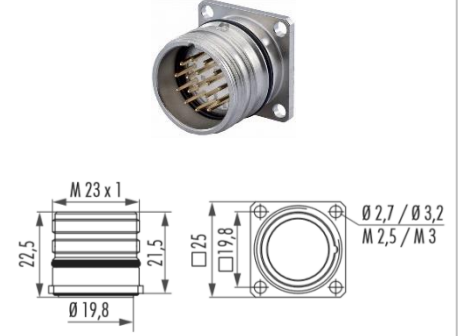

SAMPLE APPLICATION FIELDS

- Elevators
- Press machines
- Crane systems
- Wood processing machines
- Marble processing machines
- Storage positioning
- Dam protections
- Sluice gate control
- Air compressors
- Glass processing machines
- Lifting platforms
- Applications in medical technologies (operating table etc.)
- Forklifts
- Screw machines
- Paper machines
- Sewing machines
- Hydraulic machines
- Sheet metal machines
- Printing machines
- Horizontal control equipments
- Construction machines
- Industrial robots
- Injection machines
- X-Y axis displacement
- Liquid level measurements and position control



ORDER CODE

Model	Stroke Length *	Output Signals
AWE 110	Different stroke (measuring) lengths between 0...300 mm and 0...1200 mm	2 (A,B) 3 (A,B,Z) 4 (A,/A,B,/B) 6 (A,/A,B,/B,Z,/Z)
AWE 110	XX	XXX
Resolution*	Supply and Output	Electrical Connection*
05 : 0.05 mm/pulse 01 : 0.1 mm/pulse (standard) 02 : 0.2 mm/pulse	PP : 10...30 VDC Supply : 10...30VDC Output TTL : 5 VDC Supply : 5 VDC TTL RS422 Line Driver Output HTL : 10...30 VDC Supply : 5 VDC TTL RS422 Line Driver Output HPL : 5...30 VDC Supply (standard) : 5...30 VDC Push-Pull Output	3M : 3m (standard) 5M : 5m 10M: 10m S13 : M12 5 Pin Male Socket S14 : M12 8 Pin Male Socket S16 : M16 8 Pin Male Socket S23 : M23 12 Pin Male Socket

(*) Please contact for other (customized) options.

Atek Elektronik Sensör Teknolojileri Sanayi ve Ticaret A.Ş.



Gebze OSB, 800. Sokak, No:814 Gebze/KOCAELİ/TURKEY



Tel: +90 262 673 76 00



Fax: +90 262 673 76 08



www.ateksensor.com



info@ateksensor.com

PRC Technologies Corp., Ltd.
Tel: 02 530 1714, 02 530 1619, 02 530 1621 Fax: 02 530 1731
Email: info@prtechth.com, www.prtechth.com