



## TUV PL-L 36W/4P 1CT

Product family description  
Compact single-ended low-pressure  
mercury vapour discharge lamps

### Product Features

- Emit short-wave UV radiation with a peak at 253.7 nm (UV-C) for germicidal action
- Lamp glass filters out the 185 nm ozone-forming line
- Protective inside coating limits depreciation of useful UV-C output
- Warning sign on lamp indicates UV-C radiation output

### Application

- Killing or inactivating bacteria, viruses and other primitive organisms
- Air, water and surface disinfection in hospitals, bacteriological research and pharmaceutical environments, and food processing industries such as dairies, breweries and bakeries
- Disinfection of drinking water, waste water, swimming pools, air conditioning systems, cold storage rooms, packing materials etc.
- Used in a variety of photochemical processes


Product data	
Order code	628787 40
Full product code	871150062878740
Full product name	TUV PL-L 36W/4P 1CT
Order product name	TUV PL-L 36W/4P 1CT/25
Packing type	1 Carton
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500628787
Bar code on intermediate packing - EAN2	
Bar code on outerbox - EAN3	8711500628794
Logistic code(s) - 12NC	9279 034 04007
ILCOS code	
Net weight per piece	104.000 GR
Successor order code	

# PHILIPS


Product data	
System Description	-
Cap-Base	2G11
Cap-Base Information	4 Pins
Bulb	2xT16
Execution	-
Main Application	Disinfection
Name Extension	PL-L
Additional Information	-
Packing Type	1CT [1 Carton]
Packing Configuration	25
Useful Life	8000 hr
Life to 50% failures EM	15000 hr
Product Nett Weight	114 gr
Rated Lamp Wattage	36W
Technical Lamp Power	36 W
Lamp Voltage	105 V
Lamp Current	0.44 A
Colour Code	TUV
Colour Designation (text)	-
UV-C Radiation	10.9 W




TUV PL-L HF/HO/-

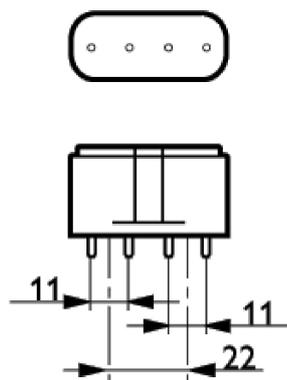

Cap-Base 2G11

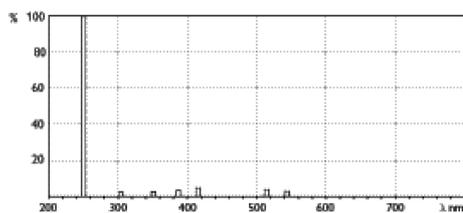


TUV PL-L

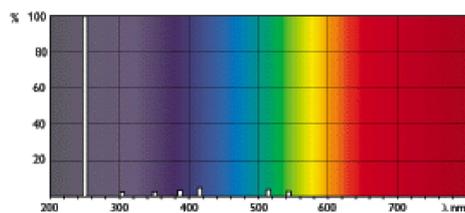

TUV PL-L

# PHILIPS

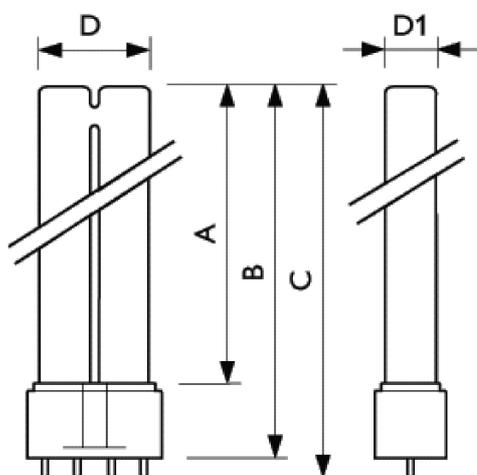

TUV PL-L

	A	B	C	D	D1
Full product name	Max	Max	Max	Max	Max
TUV PL-L 36W/4P 1CT	385	410	415	39	18



Distributed by: PRC Technologies Corp., Ltd. Tel: 02 530 1714, 02 530 1619, 02 530 1621 Fax: 02 530 1731  
Email: [info@prctechnologies.co.th](mailto:info@prctechnologies.co.th), [www.prctech-th.com](http://www.prctech-th.com)