

# UV Sensor "UV-Water-PTFE"

10 bar water pressure proof UV sensor with G1/4" thread

## GENERAL FEATURES

1/2



### Properties of this sensor

The "UV-Water-PTFE" is a waterproof (10 bar or 145 psi) sensor with a G1/4" thread to be used in pressurized water systems. The sensor housing is made of Teflon (PTFE). The sensor is suited for low pressure lamps. The sensor contains integrated electronics and is shielded against electromagnetic interference. Sensor configuration options are spectral response, signal output type and measuring range. The signal output is either a voltage of 0 to 5 V, a current of 4 to 20 mA, CAN bus interface or USB. The UV sensor is available with a NIST or PTB traceable calibration.

The measuring range of **analog sglux UV sensors** is 3 orders of magnitude corresponding to 5 mV to 5 V or 4.02 mA to 20 mA output. The highest sensitivity range is 1 nW/cm<sup>2</sup> to 1 μW/cm<sup>2</sup>. The lowest sensitivity range is 20 mW/cm<sup>2</sup> to 20 W/cm<sup>2</sup>. The **digital sglux UV sensors** contain an integrated microprocessor that converts the UV radiation into 125kbit/s digital CAN bus data. A large dynamic range of 5 orders of magnitude allows to measure low radiation and strong radiation without changing the probe. Customers may specify any range between the mentioned limits.

Page 3 of this datasheet allows to enter requirements of the needed sensor. After selection you may forward this document to factory or agent, or alternatively use the sensor probe online configurator at [www.sglux.com](http://www.sglux.com). Please contact us for assistance.

## SPECIFICATIONS

### Fixed Specifications

Parameter	Value
Dimensions	please refer to drawing on page 2
Weight	60 g
Temperature Coefficient (30 to 65°C)	0.05 to 0.075%/K
Operating Temperature	-20 to +80°C
Storage Temperature	-40 to +80°C
Humidity	< 80%, non condensing, on request: 100% submersible


### Configurable Specifications

Parameter	Value (page 3 shows more detailed information)
Spectral Sensitivity	Broadband UV, UVA, UVB, UVC, UV-Index, Bluelight and UV+VIS
Signal Output	0 to 5 V or 4 to 20 mA or CAN bus signal (125kbit/s) or USB
Current Consumption	for 0 to 5 V = < 30 mA / for 4 to 20 mA = signal out / digital = < 17 mA
Connections	cable = 2 m cable with tinned leads on free end plug = 5 pin male connector with 2 m cable with tinned leads on free end CAN = 2 m cable with 8 pin male connector (to converter or else) USB = with 1.5 m cable with USB-A plug
Measuring Range	between 1 nW/cm <sup>2</sup> to 1 μW/cm <sup>2</sup> and 20 mW/cm <sup>2</sup> to 20 W/cm <sup>2</sup> for analog or 100 μW/cm <sup>2</sup> to 20 W/cm <sup>2</sup> for digital sensors (see questionnaire sheet)

# UV Sensor "UV-Water-PTFE"


10 bar water pressure proof UV sensor with G1/4" thread

## FIELD OF VIEW


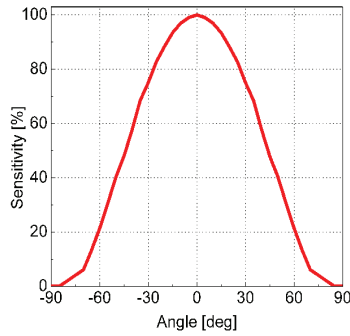


## DRAWING


### ANALOG CABLE

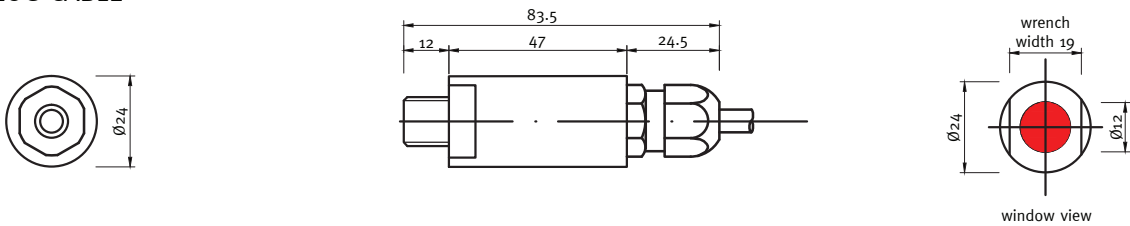

### ANALOG PLUG


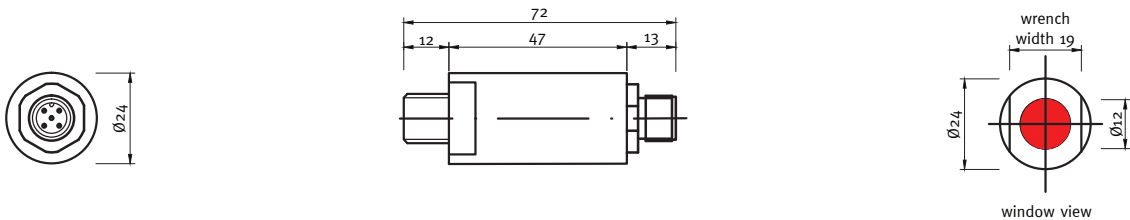


connector view  
5 pin M 12 x 1  
RSFM<sub>5</sub>



plug connection  
5 pin M 12 x 1  
e.g. Lumberg PRSFM 5

### DIGITAL

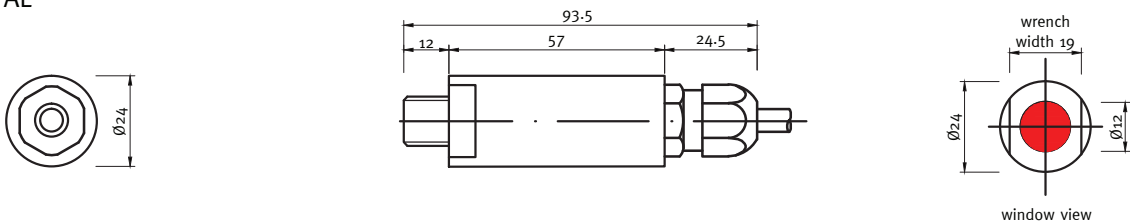

M 16 x 0.75

KFV 80 plug




pin layout

# UV Sensor "UV-Water-PTFE"

## Requirements questionnaire sheet

### STEP 1 → Configuration of Normalized Spectral Responsivity

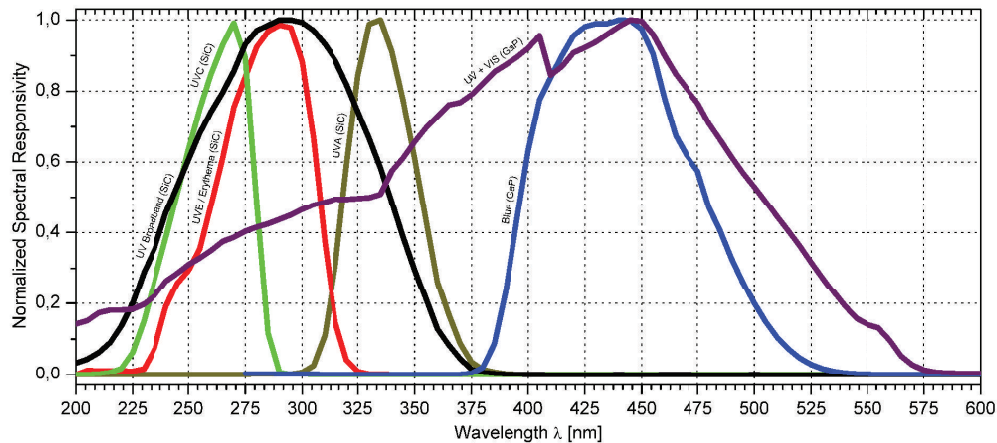

Please select

- Broadband UV (SiC)**
- UVC (SiC)**
- UVB/Erythema (SiC)**
- UVA (SiC)**
- Blue (GaP)**
- UV + VIS (GaP)**

### STEP 2 → Signal Output Type Selection

Please tick your selection. The pin configuration is shown in drawings on page 2.

Output Type	Description	Connection = "cable"	Connection = "male plug"
<input type="checkbox"/> 0 to 5 V	0 to 5 V voltage output proportional to radiation input. Supply voltage is 7 to 24VDC, current consumption is < 30 mA.	<input type="checkbox"/> V <sub>-</sub> = brown, V <sub>+</sub> = white, V <sub>out</sub> = green, shield = black	<input type="checkbox"/> V <sub>-</sub> = 1, V <sub>+</sub> = 4, V <sub>out</sub> = 3
<input type="checkbox"/> 4 to 20 mA	4 to 20 mA current loop for PLC controllers. The current is proportional to the radiation, supply voltage is 24VDC.	<input type="checkbox"/> V <sub>-</sub> = brown, V <sub>+</sub> = white, shield = black	<input type="checkbox"/> V <sub>-</sub> = 1, V <sub>+</sub> = 4
<input type="checkbox"/> CAN bus signal	VSCP protocol according to the following specifications: <a href="http://download.sglux.de/probes-digital/vscp-protocol/">http://download.sglux.de/probes-digital/vscp-protocol/</a>	Pins 1 & 7 = CAN low Pins 3 & 8 = CAN high Pins 2 & 4 & 5 = GND	
<input type="checkbox"/> USB	The signal is transmitted via standard USB-A plug to a computer. Software and 1.5 m cable are included.		

### STEP 3 → Measurement Range Selection

Please mark your approx. max. UV intensity to be measured. The dynamic range for analog UV sensors is 3 orders of magnitude and for digital UV sensors it is 5 orders of magnitude.

max. UV intensity	1 μW/cm <sup>2</sup>	10 μW/cm <sup>2</sup>	100 μW/cm <sup>2</sup>	1 mW/cm <sup>2</sup>	10 mW/cm <sup>2</sup>	100 mW/cm <sup>2</sup>	1 W/cm <sup>2</sup>	10 W/cm <sup>2</sup>	20 W/cm <sup>2</sup>

# Sensor Probes Overview and Accessories

## SENSOR PROBES OVERVIEW



**UV-Surface** → Top looking surface-mount UV sensor  
For UV radiation reference measurements of radiation exposed to a surface (diameter 38 mm).



**UV-Air** → Threaded body UV sensor  
With M22x1.5 thread for many mounting possibilities i.e. inside UV radiation chambers.



**UV-Cosine** → Waterproof cosine corrected UV sensor for outdoor use  
Stain repellent for outdoor or in-water measurements. Particularly suited for UV-Index measurements.



**UV-Water-G3/4** → 10 bar water pressure proof UV sensor with G3/4" thread  
Used in pressurized water systems. Suited for low and medium pressure lamps.



**UV-Water-PTFE** → 10 bar water pressure proof UV sensor with G1/4" thread  
Used in pressurized water systems. Suited for low pressure lamps.



**UV-DVGW** → UV sensor for DVGW (40°) certified water purifiers  
Complies with standard DVGW294-3(2006), suited for certified water purifiers.



**UV-DVGW-160** → UV sensor for DVGW (160°) and ÖNORM certified water purifiers  
Complies with standard DVGW294-3(2006) and ÖNORM 5873-2, suited for certified water purifiers with 160° FOV.



**UV-Cure** → Sensor for strong UV irradiation, working temperature up to 170° (338°F)  
To control curing processes or other high temperature operations where strong UV light is present.



**TOCON-Probe** → Miniature UV sensor  
Miniature UV sensor in M12x1 housing. Available with 0 to 5 V voltage output.

## ACCESSORIES FOR ANALOG SENSOR PROBES



**Sensor Monitor 5.0** measuring and control module



**RADIKON** → converter box and measurement controller

## ACCESSORIES FOR DIGITAL SENSOR PROBES



**UVTOUCH** → digital multi-channel UV radiometer



**DIGIBOX** → CAN-to-USB converter



**Control Pad** → windows 8 based 10.1" tablet computer display unit

## WINDOWS



**WIN294** → measurement window acc. to DVGW 294-3 and ÖNORM M5873