


# Current-Relay STW20V

## AC-Detection, AND-Evaluation, 3 Transformers

### STW20V

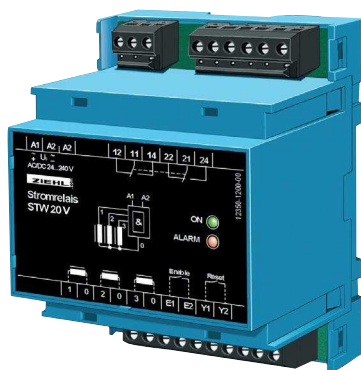

The current relay STW20V monitors the current in up to 3 lines with current transformers STWA 1 (AND circuit). If there is a current in all 3 monitored lines, the relay (2 change-over contacts) picks up. If there is no current in at least one of the lines, the relay releases.

The relay works in closed circuit current. When voltage is applied to the STW, the relay signals an alarm until the it has picked up. This can be avoided if the device is constantly alive and monitoring is started by closing a contact at the Enable input. With a bridge at the Enable input, monitoring is automatically started when voltage is applied.

- 3 inputs (transformer STWA1)
- 3 x current-sensor S1 (power-supply required)
- AND-evaluation
- output relay 2 CO
- switching point app. AC 1 A
- Enable-input
- storage of alarms or Auto-Reset
- LEDs power on and alarm
- housing V4 for mounting on DIN-rail or wall-mount


### Applications:

Identifies power failure with 1- or 3-phase electrical consumers, e.g. with monitoring of heating elements or heating installations where a constant heating has to be guaranteed.

A further application is the identification of phase failure, monitoring of fuses, or triggering of operating hours counters.

Order-number  
AC/DC 24 - 240 V

**S225124**

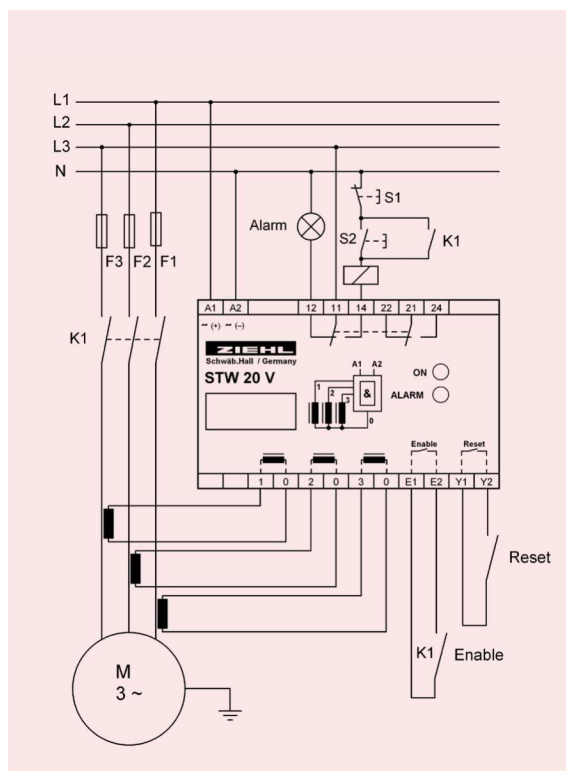

### Technical Data

#### Power supply Us

#### Function

Transformer input  
Overload cap. continuous/  
max.10s  
Switching point on  
Switching point off  
Switch-off delay  
Switch-on delay  
Overload capacity

#### Output relay

Type of contact  
Testing conditions  
rated ambient temperature  
range

#### Dimensions H x B x T

Protection housing / terminals  
Weight

AC/DC 24 - 240 V, < 3 W, < 5 VA,  
(AC 20 - 264 V, DC 20,4 - 297 V) AND-evaluation  
AND-evaluation  
1 or 3, type STWA 1  
100A / 300 A

≤ AC 1 A  
≥ AC 0,3 A  
approx. 0,3 s.  
approx. 0,3 s.  
with STWA 1 unlimited

#### 2 CO

**type 2** see "general technical informations"  
see "general technical informations"

-20°C...+55°C

design V 4: 90 x 70 x 58 [mm]

IP 30 / IP 20  
approx. 240 g